



Wera
Click-Torque



Click-Torque A 5 torque wrench with reversible ratchet, 2.5-25 Nm



Application: For clockwise torque-control

Precision: ± 4% of set value, as per DIN EN ISO 6789-1: 2017-07

Design: With 1/4" square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle

	Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm	mm	mm		
05075604001	1/4"	2.5-25	0.10	1-18	290	121	42	25	11,5	11 27/64"	4 49/64"	1 21/32"	1"	7/16"

Click-Torque A 6 torque wrench with reversible ratchet, 2.5-25 Nm



Application: For clockwise torque-control

Precision: ± 4% of set value, as per DIN EN ISO 6789-1: 2017-07

Design: With 1/4" hex drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle


	Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm	mm	mm		
05075605001	1/4"	2.5-25	0.10	1-18	290	121	42	25	11,5	11 27/64"	4 49/64"	1 21/32"	1"	7/16"

Click-Torque A 6



With 1/4" hex drive.

Release mechanism



When the set torque value is reached, an audible and tactile mechanism triggers.

Click-Torque B 1 torque wrench with reversible ratchet, 10-50 Nm




Application: For clockwise torque-control

Precision: ± 3% of set value, as per DIN EN ISO 6789-1: 2017-07

Design: With 3/8" square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle

		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05075610001	3/8"	10-50	0.25	8-36	360	140	47	35	16,5	14 11/64"	5 33/64"	1 27/32"	1 3/8"	5/8"	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05075611001	3/8"	20-100	0.5	15-73	405	140	47	43	18,5	15 15/16"	5 33/64"	1 27/32"	1 11/16"	45/64"	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05075620001	1/2"	10-50	0.25	8-36	360	140	47	35	16,5	14 11/64"	5 33/64"	1 27/32"	1 3/8"	5/8"	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05075621001	1/2"	20-100	0.5	15-73	405	140	47	43	18,5	15 15/16"	5 33/64"	1 27/32"	1 11/16"	45/64"	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05075622001	1/2"	40-200	1.0	30-146	510	140	47	43	18,5	20 5/64"	5 33/64"	1 27/32"	1 11/16"	45/64"	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05075623001	1/2"	60-300	1.0	45-220	595	140	47	43	18,5	23 27/64"	5 33/64"	1 27/32"	1 11/16"	45/64"	



Simple setting



With audible and tactile clicks when adjusting the scale values.

Release mechanism



When the set torque value is reached, an audible and tactile mechanism triggers.

Click-Torque C 2 Push R/L adjustable torque wrench for clockwise and anti-clockwise torque-control, 20-100 Nm



Application: For clockwise and anti-clockwise torque-control

Precision: Precise to $\pm 3\%$ of the set value, as per DIN EN ISO 6789-1:2017-07


Design: With $\frac{1}{2}$ " square head drive with socket locking, square head insert to change the tightening direction, fine-teethed ratchet mechanics, 45 teeth; easy setting and saving of the desired torque, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the torque value is reached

Handle: Ergonomic 2-component handle

	Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
05075625001	$\frac{1}{2}$ "	20-100	0.5	15-73	405	140	47	43	18,5	15 ¹⁵ / ₁₆ "	5 ³³ / ₆₄ "	1 ²⁷ / ₃₂ "	1 ¹¹ / ₁₆ "	⁴⁵ / ₆₄ "

	Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
05075626001	$\frac{1}{2}$ "	40-200	1.0	30-146	510	140	47	43	18,5	20 ⁵ / ₆₄ "	5 ³³ / ₆₄ "	1 ²⁷ / ₃₂ "	1 ¹¹ / ₁₆ "	⁴⁵ / ₆₄ "

	Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
05075631001	$\frac{3}{4}$ "	200-1000	1.0	148-737	1250	140	47	63	30	49 ⁷ / ₃₂ "	5 ³³ / ₆₄ "	1 ²⁷ / ₃₂ "	2 ³¹ / ₆₄ "	1 ³ / ₁₆ "



For right and left direction



The Click-Torque torque wrench is suitable for clockwise and anti-clockwise torque-control. Very smooth change of direction thanks to captive square head insert.

Series 7400 Kraftform adjustable torque screwdrivers (0.1-3.0 Nm) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6.3 and E 6.3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Accuracy: ±6 % (DIN EN ISO 6789). Numerical torque valuescale. Reliable slipping mechanism and acoustic signal when reaching the set torque.

Handle: Kraftform with non-roll feature, multi-component

	Art.No.	Nm	Nm	mm	mm	mm
05074770001 ¹⁾	7430	1/4" 0.10-0.34	0.015	89	142	5 7/16"
05074772001 ¹⁾	7431	1/4" 0.30-1.00	0.05	89	142	5 7/16"
05074774001 ¹⁾	7432	1/4" 0.90-1.50	0.05	89	142	5 7/16"
05074700001	7440	1/4" 0.3-1.2	0.05	105	155	6"
05074701001	7441	1/4" 1.2-3.0	0.10	105	155	6"

¹⁾With attachable magnifying glass, dramatically improving visibility.

Series 7400 Kraftform pre-set, adjustable torque screwdrivers (0.3-3.0 Nm) with Rapidaptor quick-release chuck, handle size 105 mm



Application: Suitable for 1/4" DIN ISO 1173-C 6.3 and E 6.3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Pre-set torque: 0.3 Nm, 1.2 Nm

Accuracy: ± 6% (DIN EN ISO 6789). Reliable slipping mechanism and acoustic signal when reaching the set torque.

Handle: Kraftform with non-roll feature, multi-component

	Art.No.	Nm	Nm	mm	mm	mm
05074715001	7460	1/4" 0.3-1.2	0.3	105	155	6"
05074716001	7461	1/4" 1.2-3.0	1.2	105	155	6"

Series 7400 Kraftform pistol handle, adjustable torque screwdrivers (3.0-8.8 Nm) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6.3 and E 6.3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Accuracy: ±6 % (DIN EN ISO 6789). Numerical torque value scale. Reliable slipping mechanism and acoustic signal when reaching the set torque.

Handle: Kraftform pistol grip, multi-component

	Art.No.	Nm	Nm	mm	mm	mm
05074702001	7442	1/4" 3.0-6.0	0.25	150	100	4"
05074705001	7443	1/4" 4.0-8.8	0.40	150	100	4"

Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm



	Art.No.	Nm	mm	mm	mm
05074715010	7460	1/4" 0.3-1.2	105	155	6"
05074716010	7461	1/4" 1.2-3.0	105	155	6"

Series 7400 Kraftform pre-set, adjustable torque screwdrivers (0,1-1,5 Nm) with Rapidaptor quick-release chuck, handle size 89 mm



Application: Suitable for 1/4" DIN ISO 1173-C 6.3 and E 6.3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Pre-set torque: 0.1 Nm, 0.3 Nm, 0.9 Nm

Accuracy: ± 6% (DIN EN ISO 6789). Reliable slipping mechanism and acoustic signal when reaching the set torque.

Handle: Kraftform with non-roll feature, multi-component

	Art.No.	1/4"	Nm	Nm	mm	mm	mm
05074790001	7450	1/4"	0.1	0.1-0.34	89	133	5 1/4"
05074792001	7451	1/4"	0.3	0.3-1.0	89	133	5 1/4"
05074794001	7452	1/4"	0.9	0.9-1,5	89	133	5 1/4"

Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 89 mm



	Art.No.	1/4"	Nm	mm	mm	mm
05074790010	7450	1/4"	0.1-0.34	89	133	5 1/4"
05074792010	7451	1/4"	0.3-1.0	89	133	5 1/4"
05074794010	7452	1/4"	0.9-1,5	89	133	5 1/4"

Series 7400 Kraftform pistol handle, pre-set adjustable torque screwdrivers (3.0-8.8 Nm) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6.3 and E 6.3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Pre-set torque: 3.0 Nm, 4.0 Nm

Accuracy: ± 6% (DIN EN ISO 6789). Reliable slipping mechanism and acoustic signal when reaching the set torque.

Handle: Kraftform pistol grip, multi-component

	Art.No.	1/4"	Nm	Nm	mm	mm	mm	mm
05074717001	7462	1/4"	3.0	3.0-6.0	150	100	6"	4"
05074728001	7463	1/4"	4.0	4.0-8.8	150	100	6"	4"

Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, pistol handle



	Art.No.	1/4"	Nm	mm	mm	mm	mm
05074717010	7462	1/4"	3.0-6.0	150	100	6"	4"
05074728010	7463	1/4"	4.0-8.8	150	100	6"	4"

Which type of bit is needed for which job?



Impaktor Bits



For use with impact screwdrivers. Improve productivity when screwdriving with 0 power tools.



Stainless



Wera stainless steel bits are manufactured out of stainless steel so unsightly rust can be avoided. The stainless steel bits from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. There are no limitations to the industrial applications they are suitable for.



BDC Bits



The diamond coating of the DC bits lowers the danger of slipping as the minute diamond particles literally “bite” themselves into the screw head.

Z Bits



Tough-absorbing Wera bits (Z) prevent any premature breakage of the drive tip.



TZ Bits



TZ-Bits are tough bits with a torsion zone. Torsion bits absorb the damaging peak torque loads in the torsion zone. This prevents premature wear and enhances the service life of the bits.



BTZ Bits



BiTorsion bits are absolutely premium products. They have a softer BiTorsion zone which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.

RH Bits



Bits with reduced shaft diameter ensure that screws can be sunk without damaging the surface. This is particularly necessary in drywall construction applications.



TH Bits



TH-Bits are hard bits with a torsion zone. Torsion bits absorb the damaging peak torque loads in the torsion zone. This prevents premature wear and enhances the service life of the bits.



BTH Bits



BTH-Bits have an additional tempered BiTorsion zone, which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.

A Bits



A stands for aviation. A bits are particularly hard bits with a sharp-edged profile which e.g. penetrates screw profiles full of paint (such as on fuselage panels) ensuring a dependable transfer of force between the bit and the screw.

J Bits



J stands for Japan. J bits have been optimised to suit Asian PH screws. In particular, they are for use with very small dimensions as set out in the Japanese Camera Standard.

ACR® Bits



ACR® stands for “anti-cam-out ribs”. ACR® bits have ribs at the drive tip that protect against slipping out of the screw head. It is recommended that ACR® bits are matched with ribbed ACR® screws for maximum effect. ACR® is a registered trademark of Phillips Screw Company.



TiN Bits



TiN stands for titanium-nitrite. An extremely hard coating to withstand permanent loads such as during continual screwdriving operations in series manufacturing.

Bit Holders

897/4 IMP Impaktor holder with retaining ring and ring magnet



Suitable for extra high torque e.g. from modern 18 volt impact screwdrivers with particularly high resilience. Reduces the risk of premature breakage of the holder or bit and increases the productivity when screwdriving with power tools.

897/4 R Rapidaptor BiTorsion Universal Bit Holder



Designed with special BiTorsion zone. The energy from peak loads is diverted into the BiTorsion zone. Considerable reduction of the risk of breakage, much longer service life.

887/4 RR Rapidaptor Universal Bit Holder with ring magnet



The floating, free-turning magnetic sleeve securely holds even large and heavy screws to enable immediate application. There is no need to hold the screw when applying the tool – something which can be dangerous and painful. Also ideal for overhead work.

889/4/1 K Rapidaptor Universal Bit Holder



Rapid bit change without needing any additional tools. One-hand operation with a freely spinning sleeve for simplified guidance of the tool. Also available in a BiTorsion design.

894/4/1 K Universal Bit Holder



For a firm, wobble-free connection between holder and bit with quick-release action. Simply push sleeve forward to change bits. The non-magnetic version prevents any unwanted attraction of metal filings.

893/4/1 K Universal Bit Holder



With stainless steel sleeve and strong permanent magnet.



889/4/1 F Rapidaptor free-running bit holder for torque screwdrivers with pistol handle



Tip: Suitable for bits with 1/4"- external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera connection series 1 and 4

Design: With free-running feature for particularly quick return movement, without having to remove the screwdriver when tightening screws. Especially suitable for the applications with Wera torque screwdrivers with pistol handle in the 7400 range. Rapidaptor technology with rapid-in, rapid-out, rapid-spin, chuck-all and single-hand functions, with strong permanent magnet

Drive: 1/4"-hexagon, suitable for mounting as per DIN ISO 1173-F 6.3

	mm	mm	mm	mm	mm
05052501001	1/4"	64	2 33/64"	1/4"	16,5

Bit-Check 6 Impaktor 1



6 Impaktor bits. The "Take it easy" Bit-Checks have bits with a sleeve which – from its colour and size designation – make it simple to access the right bit quickly.

05057695001	
+	851/4 IMP DC 1x PH 2x50; 1x PH 3x50
+	855/4 IMP DC 1x PZ 2x50; 1x PZ 3x50
+	867/4 IMP DC 1x TX 25x50; 1x TX 30x50

Magnetic



Bitholders, magnetic, for easier application of the screw



Torsion zone



Torsion zone specially designed to absorb such forces and thereby protect the bit tip.



Impaktor Bits



Impact bits are needed when a strong power tool is used. Impact bits were specifically developed to withstand high power tool forces.

At the workplace



The Bit-Checks can be positioned upright at the workplace so the tool is always quickly to hand.

Bit-Check 12 BiTorsion 1



1 bit holder Rapidaptor with quick-release chuck, 11 BiTorsion bits for long service life, tough, for universal use. The "Take it easy" Bit-Checks have bits with a sleeve which – from its colour and size designation – make it simple to access the right bit quickly.

05057420001		
⊙ ⊙	889/4/1 K	1x 1/4"x50
+	851/1 BTZ PH	1x PH 1x25; 2x PH 2x25
+	855/1 BTZ PZ	1x PZ 1x25; 2x PZ 2x25
⊙	867/1 TORX® BTZ	1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25


Bit-Check 30 Universal 1



1 bit holder Rapidaptor with quick-release chuck, 29 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use, extra-hard (H).

05056440001		
⊙ ⊙	889/4/1 K	1x 1/4"x50
+	851/1 TZ PH	2x PH 1x25; 3x PH 2x25; 1x PH 3x25
+	855/1 TH PZ	2x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25
⊙	867/1 TZ TORX®	1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25
⊙	867/1 Z TORX® BO	1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25
⊙	800/1 TZ	1x 1,0x5,5x25
⊙	840/1 Z Hex-Plus	1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25

Patio construction set T 1

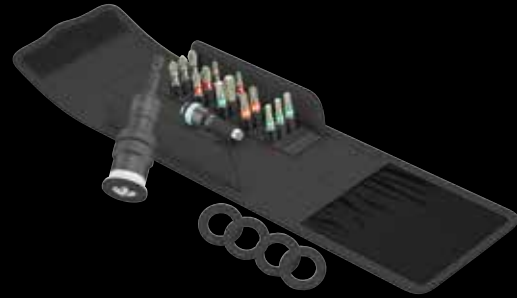

Compact Wera tool set with the 17 most common screwdriving tools for patio construction. 1 bit holder with variable screw depth limitation, with retaining ring for a secure hold of the bits, 4 spare felt rings, which prevent brush marks on the patio decking, 1 Rapidaptor Stainless bit holder with quick-release chuck, 15 Stainless bits in stainless steel design to prevent extraneous rust, Take it easy tool finder: Colour coding in accordance to profile & size stamp, helps find the required bit quickly.

05134021001		
⊙ ⊙	881/4/1	1x 1/4"x90 ¹⁾
⊙ ⊙	3888/4/1 K	1x 1/4"x50
+	3851/1 TS PH	1x PH 1x25; 1x PH 2x25; 1x PH 3x25
+	3855/1 TS PZ	1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25
⊙	3867/1 TS TORX®	1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25
⊙	3867/1 TS P TORX®	2x TX 25x25
	9201	4x 27.0

¹⁾The spare part kit with 5x felt rings can be ordered with the code number 05130003001.



Evenly flush countersinking of screws



The 881/4/1 bit holder allows for evenly flush countersinking of screws in decking when building patios. The screw depth can be adjusted as required. This prevents screws from being countersunk too deep.

Avoids damage caused by rot



The screw head is evenly flush with the decking, therefore so-called "water nests", which usually lead to rot, are avoided.



Our competence

Wera is one of the world's leading manufacturers of screwdriving tools, with its corporate headquarters in Wuppertal/Germany. Wera develops and produces tools for professional, industrial applications, and is a solution-provider for problems associated with screw connections.

Tools created from ideas

Wera fascinates users time and again with quite exceptional product ideas. In practical applications these ideas - with their often unique features - result in a truly professional screwdriving performance.

Comprehensive range

The range comprises more than 3,000 products and includes genuine problem solvers, even for very specific jobs.

Quality manufacturer

The quality just has to be right. This is assured through a manufacturing process that is continually monitored, and as a result: the number of complaints is near zero. Of course, Wera is ISO-certified.

Brand and trademark rights

Wera is a manufacturer of branded goods and a reliable partner for the industry, trade and users. Numerous trademark rights, which are resolutely asserted worldwide, protect our customers against substandard imitations. Wera products are a guarantee for safe, reliable working and unbeatable performance.

Product design

Wera tools are stylish and ergonomic, and Wera has received several awards for the design of its products. To work with Wera tools is to understand what design really means.

Reliable logistics

Our ability to deliver any product from the catalogue range is almost 100 %. We naturally supply worldwide.

No liability for printing errors or mistakes shall be assumed.



Wera Werkzeuge GmbH
Korzter Straße 21–25
D-42349 Wuppertal

Phone: +49 (0)202/40 45-0
E-Mail: info@wera.de
www.wera.de

Wera Tools (UK) LTD.
Railway View
Clay Cross, Chesterfield
Derbyshire, S45 9FR

Phone: +44 (0)1246 / 277756
eMail: queries@wera-tools.co.uk
www.weratools.co.uk

Wera Tools Inc. (North America)
3325 Harvester Rd, Unit 16
Burlington, ON
L7N 3N2, Canada

Phone: 1-800-267-55 41
E-Mail: info@weratools.com
www.weratools.com

Wera Tools Australia Pty Ltd.

Phone: +61-435 755 123
E-Mail: mike.sack@wera.de

Wera Tools Japan G.K

Phone: +81 70 4813 1142
E-Mail: frank.yang@wera.de

